



CANALES

Ref.º


			Características de los Canales
			Dim. Interiores
			Largo
			Sección Interior (S)
			Sección Útil (Su)
			(mm)
			(m)
			(mm²)
			(S:1,4) (mm²)
25x30	14010 CCZ		22x27
25x60	14090 CCZ		2,00
40x40	14020 CCZ		530,0
60x40	14030 CCZ		379
60x60	14040 CCZ		22x56
80x40	14050 CCZ		2,00
80x60	14060 CCZ		1099
100x40	14070 CCZ		37x37
100x60	14080 CCZ		2,00
			1280,6
			915
			56x37
			2,00
			1973,7
			1410
			56x56
			2,00
			3101,7
			2216
			73x36
			2,00
			2668,0
			1906
			76x56
			2,00
			4192,0
			2994
			96x36
			2,00
			3352,3
			2395
			96x56
			2,00
			5272,3
			3766

Capacidad de Cables Aislados

Ø Útil Máx.	N.º Máx. Conductores H07 V-U			
(mm)	1,5mm²	2,5mm²	4mm²	6mm²
20	48	32	26	19
20	98	65	52	39
35	116	79	63	47
35	180	122	97	73
55	282	191	153	114
35	243	164	132	98
55	382	259	207	154
35	305	207	166	123
55	480	325	260	194

Perforaciones de la Base (mm)

L	H	A	B	C	D	E	F
25	30	25	—	9	4,5	13	6,5
40	40						
60	60						
80	40						
100	60						

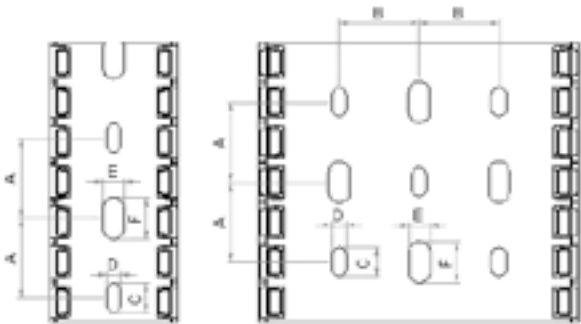

Ranuras Laterales (mm)

L	H	A	B	C	D	E	F
25	30	125	5	10,5	17	—	2,5
40	40			15	29	45	
60	60			11,5	20	—	
80	40			15	29	45	
100	60			12	20	—	
				15	29	45	
				12	20	—	
				15	29	45	

